



# Style high

Style-high is LOT Groups development in line with modern trends. The turnstile is equipped with extended height horizontally sliding flaps. This design guarantees high security and long lifespan. Turnstile flaps are made of tempered glass, and the hardware features faultless and smooth performance. Well-rounded and ergonomic design of the turnstile posts, changeable illumination and expressive indication makes this turnstile safe and comfortable for users. Style-high is the optimum choice for installation as a part of access control systems, as well as automated fare collection systems, especially in the subways.



**Slide turnstile**  
the aisle is blocked  
by means of sliding  
flaps closing them  
straight horizontally





**High flaps**  
Increased security  
against unauthorized  
passage



**Advanced optical  
sensors**  
prevents unauthorized  
access



**Antipanic**  
the function of  
opening the turnstile  
flaps to free passage  
in emergencies

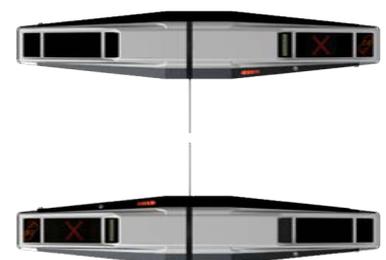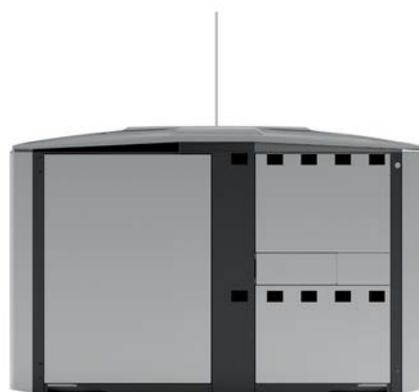

## Features:

- For passengers' safety, the turnstile has no sharp edges.
- High flaps for increased security.
- Advance optical sensors to prevent unauthorized access.
- Choice of normally-opened and normally closed operation modes.
- The installation of optional devices is available:
  - the reader of 125 kHz RFID-cards or 13,56 MHz

- MIFARE® cards;
  - the barcode ticket reader;
  - the smart-tokens reader;
  - the magnetic stripe ticket reader.
- An equipment to play some audio warnings can be installed to prevent unauthorized access attempts.

## Design options:

Casing:	polished stainless steel
	brushed stainless steel
Flaps:	sliding flaps made of tempered glass (customer marks placement is an option)

## Overall dimensions:

Post height	1590 mm
Post width	322 mm
Post length	1700 mm
Passage width	550 mm
Post weight	150 kg

## Specifications:

AC power supply	220 V
Power consumption	120 W
Capacity	25 persons/min
Torque of the flap mechanism	30 nm
Working temperatures	0...+45°C
Dust and water protection rating	IP 32

